

Effective From: 1st June, 2025



Since: 1994



EASTEN CABLE IND. LTD.

Head Office: Hotel Sadman International, Shahid Tower (Central Electric Market)
165 Nawabpur Road, Room # 503 (4 Floor), Dhaka-1100, Bangladesh.

Factory: Kutubpur, Fatullah Narayanganj.

Hotline: +8801701 858282, +88 01316 317050

www.facebook.com/eastencable, <https://eastencabbd.com>



FEDERATION OF BANGLADESH CHAMBERS
OF COMMERCE & INDUSTRY



AN ISO : 9001-2008 Certified Company



BANGLADESH ELECTRICAL MERCHANDISE
MANUFACTURER ASSOCIATION




BANGLADESH ELECTRICAL ASSOCIATION



DHAKA CHAMBER OF COMMERCE & INDUSTRY



BANGLADESH STANDARD & TESTING INSTITUTION



BANGLADESH UNIVERSITY OF ENGINEERING AND TECHNOLOGY



BANGLADESH PALLI BIDYUT UNNAYAN BOARD





EASTEN CABLE IND. LTD.

BYALF- Skin Coated FR (PVC Insulated Non-Sheathed Single Core Cable)
Standard : BDS900/2000 & BS 6004, Voltage Grade: 450/750v

SI	Product Name	MRP TK Per 100 Meter Including VAT
01	1 x 0.75 mm	1,955
02	1x 1.0 re (1-w)	2,485
03	1x 1.0 mm (3-w)	2,576
04	1x 1.3 mm (3-w)	3,249
05	1x 1.5 re (1-w)	3,584
06	1x 1.5 mm (3-w)	3,707
07	1x 1.5 mm (7-w)	3,722
08	1x 2.0 mm (3-w)	4,927
09	1x 2.5 mm (7-w)	5,917
10	1x 3 mm (7-w)	7,152
11	1x 4 mm (7-w)	9,243
12	1x 4.5 mm (7-w)	10,529
13	1x 6 mm (7-w)	13,808
14	1x 7 mm (7-w)	15,934
15	1x 10 mm (7-w)	22,902
16	1x 14.5 mm (7-w)	32,974

Flexible Cable (PVC insulated single & multi core Flexible cable)
Standard: BDS-899 & BS-6500) Voltage: 300/500 Volts

SI	Product Name	MRP TK Per 100 Meter Including VAT
17	2x8/0.19 MM(8/.0078 T/T	1,325
18	2x8/0.19 MM(8/.0078 F/T	2,458
19	2x12/0.19 MM(12/.0078 T/T	1,730
20	2x12/0.19 MM(12/.0078 F/T	3,123
21	2x14/0.19 mm (14/.0078 T/T)	2,485
22	2x14/0.19 mm (14/.0078 F/T)	3,745
23	2x23/0.19 mm (23/.0078 T/T)	3,762
24	2x23/0.19 mm (23/.0078 F/T)	5,172
25	2x40/0.19 mm (40/.0078 T/T)	6,002
26	1 x 0.4 mm (14/0.19 mm S/C)	1,257
27	1 x 0.5 mm (16/0.20 mm S/C)	1,539
28	1 x 0.65 mm (23/0.19 mm S/C)	1,912
29	1 x 0.75 mm (24/0.20 mm S/C)	2,109
30	1 x 1.00 mm (32/0.20 mm S/C)	2,722
31	1 x 1.20 mm (40/0.19 mm S/C)	3,135
32	1 x 1.50 mm (30/0.25 mm S/C)	3,970

**SI Product Name MRP TK
Per 100 Meter
Including VAT**

33	2 x 0.4 mm (14/0.19 mm 2C)	4,503
34	2 x 0.5 mm (16/0.20 mm 2C)	5,125
35	2 x 0.65 mm (23/0.19 mm 2C)	6,748
36	2 x 0.75 mm (24/0.20 mm 2C)	7,021
37	2 x 1.00 mm (32/0.20 mm 2C)	8,743
38	2 x 1.20 mm (40/0.19 mm 2C)	9,832
39	2 x 1.50 mm (30/0.25 mm 2C)	11,286
40	2 x 2.00 mm (70/0.19 mm 2C)	15,051
41	2 x 2.50 mm (50/0.25 mm 2C)	17,688
42	2 x 3.00 mm (110/0.19 mm 2C)	22,141
43	2 x 4.00 mm (56/0.30 mm 2C)	26,377
44	3 x 0.4 mm (14/0.19 mm 3C)	6,014
45	3 x 0.5 mm (16/0.20 mm 3C)	6,736
46	3 x 0.65 mm (23/0.19 mm 3C)	8,213
47	3 x 0.75 mm (24/0.20 mm 3C)	9,277
48	3 x 1.00 mm (32/0.20 mm 3C)	10,947
49	3 x 1.20 mm (40/0.19 mm 3C)	12,846
50	3 x 1.50 mm (30/0.25 mm 3C)	3,455
51	3 x 2.00 mm (70/0.19 mm 3C)	21,278
52	3 x 2.50 mm (50/0.25 mm 3C)	24,674
53	3 x 3.00 mm (110/0.19 mm 3C)	30,773
54	3 x 4.00 mm (56/0.30 mm 3C)	37,021
55	4 x 0.4 mm (14/0.19 mm 4C)	7,426
56	4 x 0.5 mm (16/0.20 mm 4C)	8,399
57	4 x 0.65 mm (23/0.19 mm 4C)	10,243
58	4 x 0.75 mm (24/0.20 mm 4C)	11,297
59	4 x 1.00 mm (32/0.20 mm 4C)	14,064
60	4 x 1.20 mm (40/0.19 mm 4C)	17,207
61	4 x 1.5 mm (51/0.193mm)	20,192
62	4 x 2.00 mm (70/0.19 mm 4C)	27,445
63	4 x 2.50 mm (50/0.25 mm 4C)	31,510
64	4 x 3.00 mm (110/0.19 mm 4C)	39,873
65	4 x 4.00 mm (56/0.30 mm 4C)	47,669

BYFY (PVC Insulated Non-Sheathed Flat Cable 2/3 Core)
Standard : BDS 900/2000 & BS 6004/84,
Voltage Grade : 300/500v

SI	Product Name	MRP TK Per 100 Meter Including VAT
66	2x 1.0 re (1-w)	6,652
67	2x 1.3 mm (3-w)	8,337



AN ISO : 9001-2008 Certified Company



EASTEN CABLE IND. LTD.

SI	Product Name	MRP TK Per 100 Meter Including VAT
68	2x 1.5 re (1-w)	9,270
69	2x 1.5 rm (7-w)	9,511
70	2x 2.0 rm 3-)	12,567
71	2x 2.5 re (1-w)	14,632
72	2x 2.5 rm	15,017
73	2x 3 rm (7-w)	17,286
74	2x 4 rm (7-w)	22,082
75	2x 4.5 rm (7-w)	25,200

BYM (PVC Insulated PVC Sheathed
Single/Multi Core Bale
Standard: BDS-900/2000 & BS 6004/84
Voltage Grade: 300/500v

SI	Product Name	MRP TK Per 100 Meter Including VAT
76	1x 1 re (1-w)	3,032
77	1x 1.3 rm (3-w)	3,882
78	1x 1.5 re (1-w)	4,250
79	1x 1.5 rm (7-w)	4,388
80	1x 2.0 rm (3-w)	5,624
81	1x 2.5 re (1-w)	6,694
82	1x 2.5 rm (7-w)	6,859
83	1x 3 rm (7-w)	8,207
84	1x 4 rm (7-w)	10,250
85	1x 4.5 rm (7-w)	11,515
86	1x 6 rm (7-w)	15,119
87	1x 7 rm (7-w)	17,043
88	1x 10 rm (7-w)	24,356
89	1x 14.5 rm (7-w)	34,672
90	1x 16 rm (7-w)	38,221
91	1x 16 rm (19-w)	38,492
92	1x 25 rm (7-w)	59,956
93	1x 25 rm (19-w)	60,263
94	1x 35 rm (19-w)	82,336
95	1x 50 rm (19-w)	116,826
96	1x 70 rm (19-w)	161,336
97	1x 95 rm (19-w)	214,864
98	2x 1.0 re (1-w)	8,731
99	2x 1.5 re (1-w)	11,366

SI	Product Name	MRP TK Per 100 Meter Including VAT
100	2x 1.5 rm (7-w)	12,360
101	2x 2.5 re (7-w)	16,412
102	2x 2.5 rm (7-w)	17,82
103	2x 4 rm (7-w)	24,015
104	2x 6 rm (7-w)	32,682
105	2x 10 rm (7-w)	56,785
106	2x 16 rm (7-w)	84,295
107	2x 25 rm (7-w)	132,209
108	2x 35 rm (19-w)	177,858
109	3x 1.0 re (1-w)	11,242
110	3x 1.5 re (1-w)	15,540
111	3x 1.5 rm (7-w)	16,378
112	3x 2.5 re (1-w)	23,331
113	3x 2.5 rm (7-w)	25,766
114	3x 4 rm (7-w)	36,002
115	3x 6 rm (7-w)	50,180
116	3x 10 rm (7-w)	78,636
117	3x 16 rm (7-w)	119,118
118	3x 25 rm (7-w)	191,205
119	3x 35 sm (7-w)	242,277
120	4x 1.0 re (1-w)	14,472
121	4x 1.5 re (1-w)	19,677
122	4x-4.5 rm (7-w)	20,316
123	4x 2.5 re (1-w)	29,333
124	4x 2.5 rm (7-w)	30,415
125	4x 4 rm (7-w)	44,870
126	4x 6 rm (7-w)	63,755
127	4x 10 rm (7-w)	103,158
128	4x 16 rm (7-w)	158,543
129	4x 25 rm (7-w)	246,485
130	4x 25 rm (19-w)	247,840
131	4x 35 sm (19-w)	328,165

BYA Standard: BDS-900, BS-6004 &
IEC-60227 Voltage : 450/750 Volts

SI	Product Name	MRP TK Per 100 Meter Including VAT
132	1x 1.3 rm	691



AN ISO : 9001-2008 Certified Company



EASTEN CABLE IND. LTD.

SI	Product Name	MRP TK Per 100 Meter Including VAT
133	1x 2.0 mm (3-w)	1,037
134	1x 3.0 mm (7-w)	1,266
135	1x 4.5 Rm	1,724
136	1x 7 mm (7-w)	2,606
137	1x 14.5 mm (7-w)	4,642

BYA LF- Skin Coated FR (PVC Insulated Non-Sheathed Single Core Cable)
Standard : BDS900/2000 & BS 6004, Voltage
Grade: 450/750v

SI	Product Name	MRP TK Per 100 Meter Including VAT
138	1x 0.5 re (1-w)	1,410
139	1x 0.75 re (1-w)	1,851
140	1x 1.0 re (1-w)	2,484
141	1x 1.0 mm (3-w)	2,575
142	1x 1.3 mm (3-w)	3,252
143	1x 1.5 re (1-w)	3,597
144	1x 1.5 mm (3-w)	3,710
145	1x 1.5 mm (7-w)	3,722
146	1x 2.0 mm (3-w)	4,827
147	1x 2.5 re (1-w)	5,859
148	1x 2.5 mm (7-w)	5,948
149	1x 3 mm (7-w)	7,153
150	1x 4 mm (7-w)	9,243
151	1x 4.5 mm (7-w)	10,529
152	1x 6 mm (7-w)	13,802
153	1x 7 mm (7-w)	15,827
154	1x 9.5 mm (7-w)	21,923
155	1x 10 mm (7-w)	22,903
156	1x 14.5 mm (7-w)	32,979
157	1x 16 mm (7-w)	38,150
158	1x 16 mm (19-w)	38,297
159	1x 25 mm (7-w)	58,938
160	1x 25 mm (19-w)	57,129
161	1x 35 mm (19-w)	78,882
162	1x 50 mm (19-w)	112,176
163	1x 70 mm (19-w)	156,413
164	1x 95 mm (19-w)	210,516
165	1x 120 mm (37-w)	284,872
166	1x 150 mm (37-w)	330,988
167	1x 185 mm (37-w)	407,964

SI	Product Name	MRP TK Per 100 Meter Including VAT
168	1x 240 mm (61-w)	531,045
169	1x 300 mm (61-w)	660,567
170	1x 400 mm (61-w)	880,273

BYA-FRLS (PVC Insulated Non-Sheathed Single Core Cable)
Standard : BDS 900/2000 & BS 6004, Voltage
Grade: 450/750v

SI	Product Name	MRP TK Per 100 Meter Including VAT
171	1 x 1.0 re (1-w)	2,509
172	1 x 1.3 mm (3-w)	3,278
173	1 x 1.5 re (1-w)	3,637
174	1 x 1.5 mm (7-w)	3,782
175	1 x 2.0 Rm	4,978
176	1 x 2.5 re (1-w)	5,917
177	1 x 2.5 mm (7-w)	5993
178	1 x 3.0 mm	7,225
179	1 x 4.0 mm	9,334
180	1 x 4.5 mm	10,632
181	1 x 6 mm	13,940
182	1 x 7.0 mm	16,089
183	1 x 10 mm	23,130
184	1 x 16 mm	36,509
185	1 x 25 mm	57,514
186	1 x 35 mm	79,483
187	1 x 50 mm	113,284
188	1 x 70 mm	157,727
189	1 x 95 mm	212,617
190	1 x 120 mm	267,316
191	1 x 150 mm	334,277

BYA Skin Coated FRLS (PVC Insulated Non-Sheathed Single Core Cable)
Standard : BDS 900/2000 & BS 6004, Voltage
Grade: 450/750v

SI	Product Name	MRP TK Per 100 Meter Including VAT
192	1x 1.0 re (1-w)	2,514
193	1x 1.3 mm (3-w)	3,282
194	1x 1.5 re (1-w)	3,639
195	1x 1.5 mm (7-w)	3,767
196	1x 2.0 mm (3-w)	4,988



AN ISO : 9001-2008 Certified Company



EASTEN CABLE IND. LTD.

SI	Product Name	MRP TK. Per 100 Meter Including VAT
197	1x 2.5 re (1-w)	5,925
198	1x 2.5 rm (7-w)	8,002
199	1x 3.0 rm (7-w)	7,215
200	1x 4.0 rm (7-w)	9,345
201	1x 4.5 rm (7-w)	10,643
202	1x 6 rm (7-w)	13,950
203	1x 7 rm (7-w)	16,098
204	1x 9.5 rm (7-w)	22,155
205	1x 10 rm (7-w)	23,148
206	1x 14.5 rm (7-w)	33,349
207	1x 16 rm (7-w)	38,577
208	1x 16 rm (19-w)	38,749

LSZH - FR : Low Smoke Zero Halogen Flame
Retardant Insulated Non-Sheathed Single Core
Cable : BDS900, BS En 50525, Voltage Grade:
450/750v

SI	Product Name	MRP TK. Per 100 Meter Including VAT
209	1 x 0.5 re (1-w)	1,646
210	1 x 0.75 re (1-w)	2,225
211	1 x 1.0 re (1-w)	2,779
212	1 x 1.0 rm (3-w)	2,919
213	1 x 1.3 rm (3-w)	3,625
214	1 x 1.5 re (1-w)	3,956
215	1 x 1.5 rm (3-w)	4,138
216	1 x 1.5 rm (7-w)	4,183
217	1 x 2.0 rm (3-w)	5,474
218	1 x 2.5 re (1-w)	6,387
219	1 x 2.5 rm (7-w)	6,485
220	1/x 3 rm (7-w)	7,767
221	1 x 4 rm (7-w)	9,942
222	1 x 4.5 rm (7-w)	11,276
223	1 x 6 rm (7-w)	14,661
224	1 x 7 rm (7-w)	17,068
225	1 x 9.5 rm (7-w)	23,080
226	1 x 10 rm (7-w)	24,087
227	1 x 14.5 rm (7-w)	34,480
228	1 x 16 rm (7-w)	37,700
229	1 x 16 rm (19-w)	37,885

BYA-FRLS (PVC Insulated Non-Sheathed Single Core Cable

Standard : BDS 900/2000 & BS 6004, Voltage
Grade: 450/750v

SI	Product Name	MRP TK. Per 100 Meter Including VAT
230	1 X 0.5 re (1-w)	1,647
231	1 x 0.75 re (1-w)	2,258
232	1 x 1.0 re (1-w)	2,785
233	1 x 1.0 rm (3-w)	2,963
234	1 x 1.3 rm (3-w)	3,637
235	1 x 1.5 re (1-w)	3,966
236	1 x 1.5 rm (3-w)	4,152
237	1 x 1.5 rm (7-w)	4,196
238	1 x 2.0 rm (3-w)	5,494
239	1 x 2.5 re (1-w)	6,417
240	1 x 2.5 rm (7-w)	6,509
241	1 x 3 rm (7-w)	7,798
242	1 x 4 rm (7-w)	9,984
243	1 x 4.5 rm (7-w)	11,324
244	1 x 6 rm (7-w)	14,730
245	1 x 7 rm (7-w)	17,154
246	1 x 9.5 rm (7-w)	23,187
247	1 x 10 rm (7-w)	24,201
248	1 x 14.5 rm (7-w)	34,575
249	1 x 16 rm (7-w)	37,820
250	1 x 16 rm (19-w)	39,908

NYR₂V (PVC Insulated PVC Sheathed Round Aluminium Wire Armouring, Single Core Cable

Standard : VDE 0271/3.69 & BDS 901/79,
Voltage Grade : 600/1000v

SI	Product Name	MRP TK. Per 100 Meter Including VAT
251	1x 300 rm (81-w)	732,305
252	1x 630 rm (91-w)	1,496,052

BYA LF - Skin Coated FR (PVC Insulated Non-Sheathed Single Core Cable)

Standard : BDS 900/2000 & BS 6004, Voltage
Grade : 450/750v

SI	Product Name	MRP TK. Per 100 Meter Including VAT
253	1x 1.5 re (1-w)	5,955
254	1x 1.5 rm (7-w)	6,440



AN ISO : 9001-2008 Certified Company



EASTEN CABLE IND. LTD.

SI	Product Name	MRP TK Per 100 Meter Including VAT
255	1x 2.5 re (1-w)	8,277
256	1x 2.5 rm (7-w)	8,935
257	1x 4 rm (7-w)	12,391
258	1x 6 rm (7-w)	17,264
259	1x 10 rm (7-w)	25,580
260	1x 16 rm (7-w)	40,614
261	1x 16 rm (19-w)	41,007
262	1x 25 rm (7-w)	61,790
263	1x 25 rm (19-w)	62,154
264	1x 35 rm (19-w)	83,515
265	1x 50 rm (19-w)	119,441
266	1x 70 rm (19-w)	164,429
267	1x 95 rm (19-w)	219,746
268	1x 120 rm (37-w)	274,630
269	1x 150 rm (37-w)	342,153
270	1x 185 rm (37-w)	421,525
271	1x 240 rm (61-w)	545,836
272	1x 300 rm (61-w)	677,797
273	1x 400 rm (61-w)	901,234
274	1x 500 rm (61-w)	1,123,741
275	1x 830 rm (127-w)	1,420,279
276	2x 1.0 re (1-w)	13,126
277	2x 1.5 re (1-w)	15,399
278	2x 1.5 rm (7-w)	16,037
279	2x 2.5 re (1-w)	21,218
280	2x 2.5 rm (7-w)	21,669
281	2x 4 rm (7-w)	31,198
282	2x 6 rm (7-w)	41,981
283	2x 10 rm (7-w)	62,048
284	2x 16 rm (7-w)	89,752
285	2x 16 rm (19-w)	90,320
286	2x 25 rm (7-w)	137,000
287	2x 25 rm (19-w)	137,994
288	2x 35 rm (19-w)	183,921
289	3x 1.0 re (1-w)	15,250
290	3x 1.5 re (1-w)	18,800
291	3x 1.5 rm (7-w)	19,442
292	3x 2.5 re (1-w)	27,177
293	3x 2.5 rm (7-w)	28,107
294	3x 4 rm (7-w)	40,215
295	2x 6 rm (7-w)	54,591
296	3x 10 rm (7-w)	82,283
297	3x 16 rm (7-w)	131,872

SI	Product Name	MRP TK Per 100 Meter Including VAT
298	3x 16 rm (19-w)	132,735
299	3x 25 rm (7-w)	201,072
300	3x 25 rm (19-w)	201,689
301	3x 35 sm (19-w)	254,200
302	3x 50 sm (19-w)	360,029
303	3x 70 sm (19-w)	495,513
304	3x 95 sm (19-w)	667,311
305	3x 120 sm (37-w)	833,643
306	3x 150 sm (37-w)	1,037,268
307	3x 185 sm (37-w)	1,285,916
308	3x 240 sm (61-w)	1,659,499
309	3x 300 sm (61-w)	2,068,269
310	3x 400 sm (61-w)	2,748,559
311	3x 25 sm/ 16 rm (7/7-w)	244,048
312	3x 35 sm/ 16 rm (19/7-w)	297,869
313	3x 50 sm/ 25 rm (19/7-w)	421,025
314	3x 70 sm/ 35 rm (19/19-w)	590,553
315	3x 95 sm/ 50 rm (19/19-w)	801,062
316	3x 120 sm/ 70 rm (37/19-w)	1,005,416
317	3x 150 sm/ 70 rm (37/19-w)	1,197,786
318	3x 185 sm/ 95 rm (37/19-w)	1,495,134
319	3x 240 sm/ 120 rm (37/37-w)	1,934,691
320	3x 300 sm/ 150 rm (61/37-w)	1,934,691
321	4x 1.0 re (1-w)	19,686
322	4x 1.5 re (1-w)	24,228
323	4x 1.5 rm (7-w)	24,645
324	4x 2.5 re (1-w)	35,634
325	4x 2.5 rm (7-w)	37,350
326	4x 4 rm (7-w)	52,224
327	4x 6 rm (7-w)	72,745
328	4x 10 rm (7-w)	109,618
329	4x 16 rm (7-w)	164,146
330	4x 16 rm (19-w)	166,815
331	4x 25 rm (7-w)	268,136
332	4x 25 rm (19-w)	268,497
333	4x 35 sm (19-w)	340,094
334	4x 50 sm (19-w)	475,141
335	4x 70 sm (19-w)	655,458
336	4x 95 sm (19-w)	887,231
337	4x 120 sm (37-w)	1,098,330
338	4x 150 sm (37-w)	1,372,704
339	4x 185 sm (37-w)	1,686,944
340	4x 240 sm (37-w)	2,208,683
341	4x 300 sm (61-w)	2,721,442



AN ISO : 9001-2008 Certified Company



EASTEN CABLE IND. LTD.

BYALF - Skin Coated FR (PVC Insulated Non-Sheathed Single Core Cable)

Standard : BDS 900/2000 & BS 6004, Voltage Grade : 450/750v

SI	Product Name	MRP TK Per 100 Meter Including VAT
342	5x 1.5 re	25,655
343	5x 1.5 rm	26,211
345	5x 2.5 re	38,557
346	5x 4 rm	58,228
347	6x 1.5 re	30,228
348	7x 1.5 re	31,951
349	7x 1.5 re	33,948
350	7x 2.5 re	50,535
351	7x 4 rm	77,988
352	8x 1.5 re	37,990
353	8x 1.5 rm	40,360
354	8x 2.5 re	59,842
355	8x 4 rm	91,710
356	10x 1.5 re	45,928
357	10x 1.5 rm	47,198
358	10x 4 rm	108,671
359	10x 2.5 re	70,892
360	12x 4 rm	129,430
361	12x 1.5 re	54,200
362	16x 1.5 re	70,377
363	19x 1.5 re	81,449
364	19x 1.5 rm	84,746
365	20x 1.5 re	86,014
366	21x 1.5 re	86,658
367	24x 1.5 re	101,742
368	27x 1.5 rm	117,358
369	29x 1.5 re	122,403
370	30x 1.5 re	125,816
371	32x 1.5 re	134,896
372	33x 1.5 re	138,089
373	36x 1.5 re	149,480
374	37x 1.5 rm	156,598
375	40x 1.5 re	164,526
376	12x 2.5 re	82,740
377	12x 2.5 rm	84,705
378	16x 2.5 re	107,770
379	21x 2.5 re	140,498
380	24x 2.5 re	159,868
381	30x 2.5 re	196,794

2XY (XLPE Insulated PVC Sheathed Single Core Cable)

Standard : IEC 60502-1, Voltage Grade : 600/1000v

SI	Product Name	MRP TK Per 100 Meter Including VAT
382	1x 1.5 re (1-w)	6,130
383	1x 1.5 rm (7-w)	6,315
384	1x 2.5 re (1-w)	8,524
385	1x 2.5 rm (7-w)	8,759
386	1x 4 rm (7-w)	12,758
387	1x 6 rm (7-w)	17,781
388	1x 10 rm (7-w)	26,342
389	1x 16 rm (7-w)	41,828
390	1x 16 rm (19-w)	42,273
391	1x 25 rm (7-w)	63,635
392	1x 25 rm (19-w)	64,012
393	1x 35 rm (19-w)	85,578
394	1x 50 rm (19-w)	123,011
395	1x 70 rm (19-w)	169,345
396	1x 95 rm (19-w)	226,317
397	1x 120 rm (37-w)	282,738
398	1x 150 rm (37-w)	352,191
399	1x 185 rm (37-w)	434,162
400	1x 240 rm (37-w)	562,289
401	1x 300 rm (61-w)	698,088
402	1x 400 rm (61-w)	928,214
403	1x 500 rm (61-w)	1,157,339
404	1x 630 rm (127-w)	1,457,516
405	2x 1.5 re (1-w)	15,857
406	2x 1.5 rm (7-w)	16,515
407	2x 2.5 re (1-w)	21,851
408	2x 2.5 rm (7-w)	22,307
409	2x 4 rm (7-w)	32,130
410	2x 6 rm (7-w)	43,235
411	2x 10 rm (7-w)	63,925
412	2x 16 rm (7-w)	92,437
413	2x 16 rm (19-w)	93,018
414	2x 25 rm (7-w)	141,095
415	2x 25 rm (19-w)	142,118
416	2x 35 rm (19-w)	189,040
417	3x 1.5 re (1-w)	19,357
418	3x 1.5 rm (7-w)	20,019
419	3x 2.5 re (1-w)	27,989
420	3x 2.5 rm (7-w)	28,947



AN ISO : 9001-2008 Certified Company



EASTEN CABLE IND. LTD.

SI	Product Name	MRP TK Per 100 Meter Including VAT
421	3x 4 mm (7-w)	41,429
422	3x 6 mm (7-w)	56,234
423	3x 10 mm (7-w)	84,671
424	3x 16 mm (7-w)	135,814
425	3x 16 mm (19-w)	136,703
426	3x 25 mm (7-w)	207,080
427	3x 25 mm (19-w)	207,613
428	3x 35 sm (19-w)	261,800
429	3x 50 sm (19-w)	370,780
430	3x 70 sm (19-w)	510,323
431	3x 95 sm (19-w)	687,256
432	3x 120 sm (37-w)	858,580
433	3x 150 sm (37-w)	1,088,176
434	3x 185 sm (37-w)	1,321,949
435	3x 240 sm (37-w)	1,709,100
436	3x 300 sm (61-w)	2,130,000
437	3x 400 sm (61-w)	2,830,548
438	3x 25 mm/ 16 mm (7/7-w)	251,341
439	3x 35 sm/ 16 mm (19/7-w)	306,772
440	3x 50 sm/ 25 mm (19/7-w)	433,609
441	3x 70 sm/ 35 mm (19/19-w)	608,205
442	3x 95 sm/ 50 mm (19/19-w)	825,003
443	3x 120 sm/ 70 mm (37/19-w)	1,037,538
444	3x 150 sm/ 70 mm (37/19-w)	1,236,069
445	3x 185 sm/ 95 mm (37/19-w)	1,539,819
446	3x 240 sm/ 120 mm (37/37-w)	1,992,466
447	3x 300 sm/ 150 mm (61/37-w)	2,501,117
448	4x 1.5 re (1-w)	24,943
449	4x 1.5 mm (7-w)	25,372
450	4x 2.5 re (1-w)	36,482
451	4x 2.5 mm (7-w)	38,465
452	4x 4 mm (7-w)	53,785
453	4x 6 mm (7-w)	74,917
454	4x 10 mm (7-w)	112,864
455	4x 16 mm (7-w)	169,742
456	4x 16 mm (19-w)	170,803
457	4x 25 mm (7-w)	276,521
458	4x 25 mm (19-w)	276,520
459	4x 35 sm (19-w)	350,257
460	4x 50 sm (19-w)	489,970
461	4x 70 sm (19-w)	675,049
462	4x 95 sm (19-w)	913,748
463	4x 120 sm (37-w)	1,131,146

SI	Product Name	MRP TK Per 100 Meter Including VAT
464	4x 150 sm (37-w)	1,413,735
465	4x 185 sm (37-w)	1,737,333
466	4x 240 sm (37-w)	2,265,605
467	4x 300 sm (61-w)	2,802,813

NYPCBY (PVC Insulated PVC-Sheathed Steel wire Armouring
with helical steel tapping, single & Multi Core Cable
Standard: VDE 0271/3.69 & BDS 901/79, Voltage Grade
600/1000v

SI	Product Name	MRP TK Per 100 Meter Including VAT
468	2x 2.5 re (1-w)	42,023
469	2x 4 mm (7-w)	54,951
470	2x 6 mm (7-w)	68,541
471	2x 10 mm (7-w)	91,142
472	2x 16 mm (7-w)	119,942
473	2x 25 mm (7-w)	177,871
474	2x 35 mm (19-w)	228,508
475	3x 1.5 re (1-w)	38,842
476	3x 1.5 mm (7-w)	40,324
477	3x 2.5 re (1-w)	49,465
478	3x 2.5 mm (7-w)	51,3245
479	3x 4 mm (7-w)	67,312
480	3x 6 mm (7-w)	84,870
481	3x 10 mm (7-w)	111,898
482	3x 16 mm (7-w)	159,950
483	3x 25 mm (7-w)	233,985
484	3x 25 mm (19-w)	236,461
485	3x 35 sm (19-w)	295,920
486	3x 50 sm (19-w)	402,908
487	3x 70 sm (19-w)	544,602
488	3x 95 sm (19-w)	725,472
489	3x 120 sm (37-w)	902,167
490	3x 150 sm (37-w)	1,112,391
491	3x 135 sm (37-w)	1,338,268
492	3x 240 sm (37-w)	1,755,628
493	3x 300 sm (61-w)	2,175,203
494	3x 400 sm (61-w)	2,869,541
495	3x 25 mm/ 16 mm (7/7-w)	289,649
496	3x 35 sm/ 16 mm (19/7-w)	343,021
497	3x 50 sm/ 25 mm (19/7-w)	472,740
498	3x 70 sm/ 35 mm (19/19-w)	648,145
499	3x 95 sm/ 50 mm (19/19-w)	862,828



AN ISO : 9001-2008 Certified Company



EASTEN CABLE IND. LTD.

SI	Product Name	MRP TK Per 100 Meter Including VAT
500	3x 120 sm/ 70 mm (37/19-w)	1,088,182
501	3x 150 sm/ 70 mm (37/19-w)	1,302,307
502	3x 185 sm/ 95 mm (37/19-w)	1,620,987
503	3x 240 sm/ 120 mm (37/37-w)	2,071,704
504	3x 300 sm/ 150 mm (61/37-w)	2,561,316
505	3x 400 sm/ 185 mm (61/37-w)	3,359,981
506	4x 1.5 re (1-w)	45,032
507	4x 1.5 rm (7-w)	46,890
508	4x 2.5 re (1-w)	58,000
509	4x 2.5 rm (7-w)	59,786
510	4x 4 rm (7-w)	78,107
511	4x 6 rm (7-w)	100,881
512	4x 10 rm (7-w)	140,862
513	4x 16 rm (7-w)	201,107
514	4x 25 rm (7-w)	295,503
515	4x 35 sm (19-w)	361,273
516	4x 50 sm (19-w)	513,701
517	4x 70 sm (19-w)	706,135
518	4x 95 sm (19-w)	932,762
519	4x 120 sm (37-w)	1,154,259
520	4x 150 sm (37-w)	1,445,432
521	4x 185 sm (37-w)	1,773,313
522	4x 240 sm (37-w)	2,308,493
523	4x 300 sm (61-w)	2,829,086

NXSWYFGbY (HT) (XLPE Insulated field limiting semi conducting layers over each conductor and core copper shield over each individual core PVC inner sheath, flat steel wire armouring followed by helical steel tapping and PVC outer sheath)
Standard : VDE 027/3.69 & BDS 901/79,
U₀/U_m=6/10 (12kv) permissible service voltage: 6.35/11kv

SI	Product Name	MRP TK Per 100 Meter Including VAT
524	3x 25 mm	397,267
525	3x 35 mm	461,454
526	3x 50 mm	591,013
527	3x 70 mm	754,177
528	3x 95 mm	950,902
529	3x 120 mm	1,130,198
530	3x 150 mm	1,315,227
531	3x 185 mm	1,597,356
532	3x 240 mm	2,007,702
533	3x 300 mm	2,431,432
534	3x 400 mm	3,127,161

NXSEYFGbY (HT) Copper Wire Screen (XLPE Insulated Semi Conducting Layers over each copper conductor and core copper wire with copper Tape over each individual core, PVC inner sheath flat steel wire armouring followed by helical steel tapping and PVC outer sheath)
Standard: VDE 0273, Voltage : 6.35/11kv

SI	Product Name	MRP TK Per 100 Meter Including VAT
535	3x 25 mm	511,525
536	3x 35 mm	592,753
537	3x 50 mm	707,528
538	3x 70 mm	871,374
539	3x 95 mm	1,068,059
540	3x 120 mm	1,251,139
541	3x 150 mm	1,526,158
542	3x 185 mm	1,782,407
543	3x 240 mm	2,209,522
544	3x 300 mm	2,629,414

Flexible Core (PVC Insulated single & multi core Flexible Cable)
Standard : BDS-899 & BS 6500
Voltage: 300/500 Volts

SI	Product Name	MRP TK Per 100 Meter Including VAT
545	Telecommunication Cable :1 Pair	2,526
546	Telecommunication Cable :2 Pair	4,107
547	Telecommunication Cable :3 Pair	6,098
548	Telecommunication Cable :4 Pair	8,737
549	Telecommunication Cable :5 Pair	10,245
550	Telecommunication Cable :6 Pair	12,346
551	Telecommunication Cable :7 Pair	14,001
552	Telecommunication Cable :8 Pair	15,638
553	Telecommunication Cable :10 Pair	19,542
554	Telecommunication Cable :15 Pair	27,955
555	Telecommunication Cable :20 Pair	36,880
556	Telecommunication Cable :25 Pair	44,993
557	Telecommunication Cable :30 Pair	53,280
558	Telecommunication Cable :40 Pair	68,945
559	Telecommunication Cable :50 Pair	84,413
560	Telecommunication Cable :100 Pair	161,040

PE Insulated Flat Twin Core Drop Wire

SI	Product Name	MRP TK Per 100 Meter Including VAT
561	Drop Wire : 2 x 0.6 mm	1,764
562	Drop Wire : 2 x 0.9 mm	3,447



AN ISO : 9001-2008 Certified Company



EASTEN CABLE IND. LTD.

COAXIAL CABLE (Copper Conductor, PE Insulated & PVC Sheathed)


SI	Product Name	MRP Tk. Per 100 Meter Including VAT
563	Coaxial: 4/C	6,108
564	Coaxial: 5/C	7,327
565	Coaxial: 6/C	9,807
566	Coaxial: RG - 8/8u	8,522
567	Coaxial: RG- 11	14,480

WELDING CABLE (Plain annealed standard copper) conductor covering with PVC or cotton tape and PVC sheathed

SI	Product Name	MRP Tk. Per 100 Meter Including VAT
568	1 x 25 mm	66,318
569	1 x 35 mm	90,359
570	1 x 50 mm	125,529
571	1 x 70 mm	174,079
572	1 x 95 mm	233,195
573	1 x 120 mm	291,807

AERIAL CABLES

SI	Product Name	MRP Tk. Per 100 Meter Including VAT
574	D-11 (Phase)	3,784
575	D-11 (Messenger)	3,044
576	D-11 (Duplex)	7,010
577	D-12 (Phase)	6,407
578	D-12 (Messenger)	6,895
579	D-12 (Duplex)	12,932

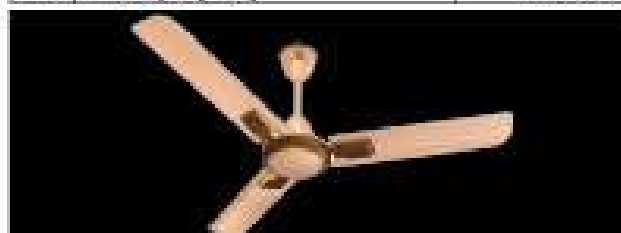

Easten Fan

SI	Product Name	MRP Tk. Per 100 Meter Including VAT
01	Easten Premium 56" Ceiling Fan	3543
02	Easten Premium 48" Ceiling Fan	3353
03	Easten Platinum 56" Ceiling Fan	3667
04	Easten Platinum 48" Ceiling Fan	3468
05	Easten Premium 36" Ceiling Fan	2854



AN ISO : 9001-2008 Certified Company



Hotline

+88 01701-858282

+88 01316317050



EASTEN LSZH CABLES

Low Smoke Zero Halogen (LSZH) Cables are build to protect lives, property and performance,

- Maintain circuit integrity up to 950oC for 180 minutes
- Flame retardant - controls fire spread
- No release of corrosive chemicals like HCl